


Part Number: ILD3135M180



TECHNOLOGIES, INC.

S-Band Radar Transistor

Part number ILD3135M180 is designed for S-Band radar applications operating over the 3.1 – 3.5 GHz instantaneous frequency band. Under 300us / 10% pulsing conditions it supplies a minimum of 180 watts of peak output power with 11dB gain typically. Specified operation is with Class AB bias. The single-ended broadband test fixture includes a temperature compensated bias network. All devices are 100% screened for large signal RF parameters in a fixed tuned broadband matching circuit / test fixture. The use of external tuners is not allowed during screening. Not recommended for CW operation.

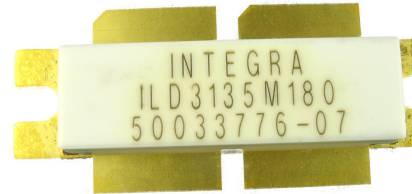

Silicon LDMOS FET

- High Power Gain
- Excellent thermal stability
- Gold Metal

Gold Metal System

- Complete Gold System
- LDMOS with Gold Metal
- Gold Bond Wires
- Gold Package Metal
- Maximum Reliability

Class AB Operation

- Specified with AB bias

Internal Impedance Matching

- Ease of Use
- Ultra Low Loss Design

BeO Free Package

- Metal Based
- Epoxy Seal

High Power RF Test / Fixture

- Single-ended
- Broadband
- Matched to 50 Ω (ohms)
- Temperature Compensated Bias
- Long-term Correlation
- 100% Device RF Screening
- No External Tuning required

TYPICAL DATA TYPICAL DATA TYPICAL DATA TYPICAL DATA

Freq (GHz)	PW (μ S)	Duty (%)	Pout (W)	IRL (dB)	Gp (dB)	Id (A)	Nd (%)	Droop (dB)	VSWR-S (3:1)
3.1	300	10	180	-17	11.8	13.7	41	-0.1	Pass
3.3	300	10	180	-15	12.3	14.1	40	-0.1	Pass
3.5	300	10	180	-12	11.8	15.2	37	-0.1	Pass

VDD=32V, IDQ=60mA

MAXIMUM RATINGS

Screen	Parameter	Symbol	Min	Max	Units	Test Conditions
BD	Drain-Source Voltage	V_{DS}	--	65	V	--
BD	Gate-Source Voltage	V_{GS}	-0.5	12	V	--
BD	Storage Temperature Range	T_{STG}	-55	+150	°C	--
BD	Operating Junction Temperature Range	T_J	-55	+200	°C	--
BD	CW Operation	--	--	--	--	Not recommended for CW operation.
Note	Screen 'BD' = parameter qualified By Design.					

THERMAL CHARACTERISTICS

Screen	Parameter	Symbol	Min	Max	Units	Test Conditions
BD	Thermal Resistance	$R_{TH(JC)}$	--	0.13	°C/W	$V_{DD}=V1, I_{DQ}=I_{DQ1}, PW=PW1, DF=DF1, T_F=25\pm5^\circ C, P_{OUT}=180W, N_D=33\%$
Note	Screen 'BD' = parameter qualified By Design.					

PROCESSING SPECIFICATIONS

Screen	Parameter	Symbol	Min	Max	Units	Test Conditions
100%	DC Wafer Probe	--	--	--	--	Per Integra specification.
Q1	Wafer DC and RF Qualification	--	--	--	--	Per Integra specification.
LM	Wire Bond Strength	--	--	--	--	Line monitor per Integra specification.
100%	Pre-cap visual inspection	--	--	--	--	Per Integra specification
100%	Gross leak test	--	--	--	--	MIL-STD-750D, Method 1071.6, Test Condition C
Note	Screen 'Q1' = parameter is qualified by assembly and test of 3 pieces minimum per wafer.					
Note	Screen 'LM' = parameter is qualified by assembly line monitor.					

DC ELECTRICAL CHARACTERISTICS

Screen	Parameter	Symbol	Min	Max	Units	Test Conditions
100%	Drain-Source Breakdown Voltage	BV_{DSS}	65	--	V	$I_{DS}=10mA, V_{GS}=0V, T_F=25\pm5^\circ C$
100%	Drain Leakage Current	I_{DSS}	--	10	uA	$V_{DS}=32V, V_{GS}=0V, T_F=25\pm5^\circ C$
100%	Operating Gate Voltage	V_{GS}	2.5	4.0	V	$V_{DS}=5V, I_D=0.10A, T_F=25\pm5^\circ C$
100%	Gate Leakage Current	I_{GSS}	--	1.0	uA	$V_{GS}=10V, V_{DS}=0V, T_F=25\pm5^\circ C$




RF ELECTRICAL CHARACTERISTICS

Screen	Parameter	Symbol	Min	Max	Units	Test Conditions
100%	Input Return Loss	IRL	-18	-7	dB	$V_{DD}=V1, I_{DQ}=I_{DQ1}, PW=PW1, DF=DF1, T_F=T_{F1}, P_{OUT}=P_{OUT1}, F=F1, F2, F3.$
100%	Pin	Pin	11	17	W	$V_{DD}=V1, I_{DQ}=I_{DQ1}, PW=PW1, DF=DF1, T_F=T_{F1}, P_{OUT}=P_{OUT1}, F=F1, F2, F3.$
100%	Power Gain	Gp	10	13	dB	$V_{DD}=V1, I_{DQ}=I_{DQ1}, PW=PW1, DF=DF1, T_F=T_{F1}, P_{OUT}=P_{OUT1}, F=F1, F2, F3.$
100%	Drain Efficiency	N_D	33	60	%	$V_{DD}=V1, I_{DQ}=I_{DQ1}, PW=PW1, DF=DF1, T_F=T_{F1}, P_{OUT}=P_{OUT1}, F=F1, F2, F3.$
100%	Pulse Amplitude Droop	D	-0.5	+0.5	dB	$V_{DD}=V1, I_{DQ}=I_{DQ1}, PW=PW1, DF=DF1, T_F=T_{F1}, P_{OUT}=P_{OUT1}, F=F1, F2, F3.$
100%	3:1 Load Mismatch Stability	VSWR-S	Pass	--	P/F	$V_{DD}=V1, I_{DQ}=I_{DQ1}, PW=PW1, DF=DF1, T_F=T_{F1}, P_{OUT}=P_{OUT1}, F=F1, F2, F3.$ Rotate 3:1 output VSWR through 360° phase. No oscillatory or pulse break-up characteristics allowed on detected output pulse. All non-harmonically related signals must be at least -65 dBc.
100%	Gain Flatness	GF	0	1.25	dB	$V_{DD}=V1, I_{DQ}=I_{DQ1}, PW=PW1, DF=DF1, T_F=T_{F1}, P_{OUT}=P_{OUT1}, F=F1, F2, F3.$
100%	Delta Insertion Phase	DIP	-30	+30	DEG	$V_{DD}=V1, I_{DQ}=I_{DQ1}, PW=PW1, DF=DF1, T_F=T_{F1}, P_{OUT}=P_{OUT1}, F=F3.$ Measure at 50% of pulse ontime. Bin per marking table.
Note 1	$V1 = 32V; I_{DQ1} = 60mA; PW1 = 300\mu s; DF1 = 10\%, P_{OUT1} = 180W$ Peak, 18W Ave					
Note 2	Test Frequencies: $F1 = 3.1$ GHz, $F2 = 3.3$ GHz, $F3 = 3.5$ GHz.					
Note 3	$T_{F1} = 25 \pm 5^\circ C$ = Device flange temperature.					
Note 4	Screen 'BD' = parameter qualified By Design.					


RF TEST FIXTURE IMPEDANCE CHARACTERISTICS

Frequency (GHz)	Z_{IF} (Ω)	Z_{OF} (Ω)
3.10	2.2 - j1.4	2.3 + j1.7
3.30	2.0 - j0.3	2.1 + j2.4
3.50	1.8 + j0.7	1.8 + j3.1
Impedance Definition		

PERFORMANCE GRAPHS (Pout=180W except as noted)

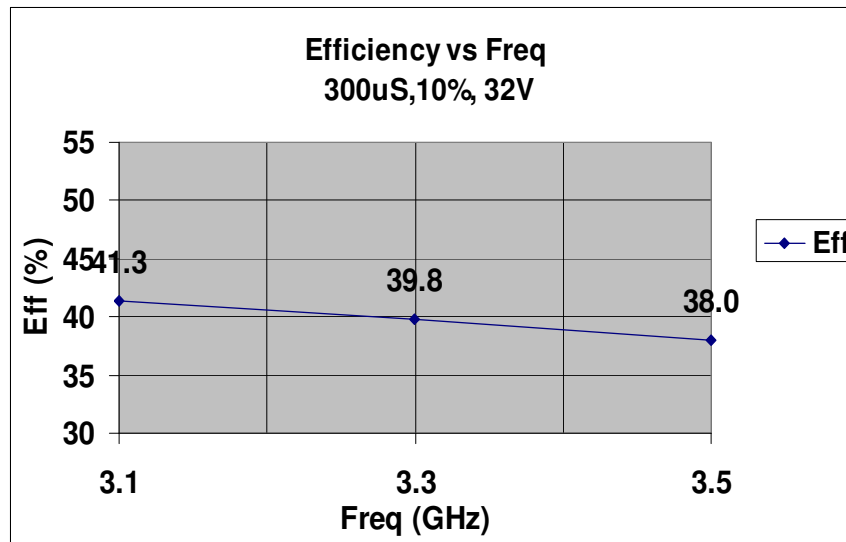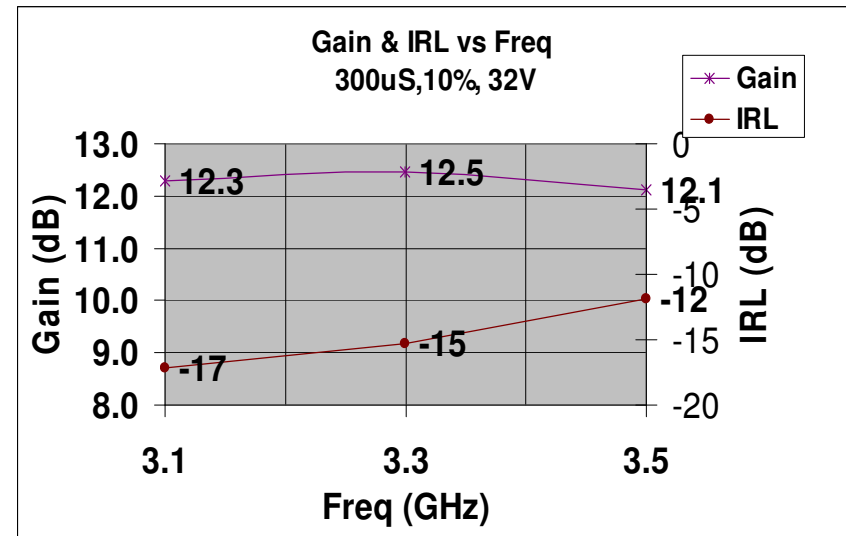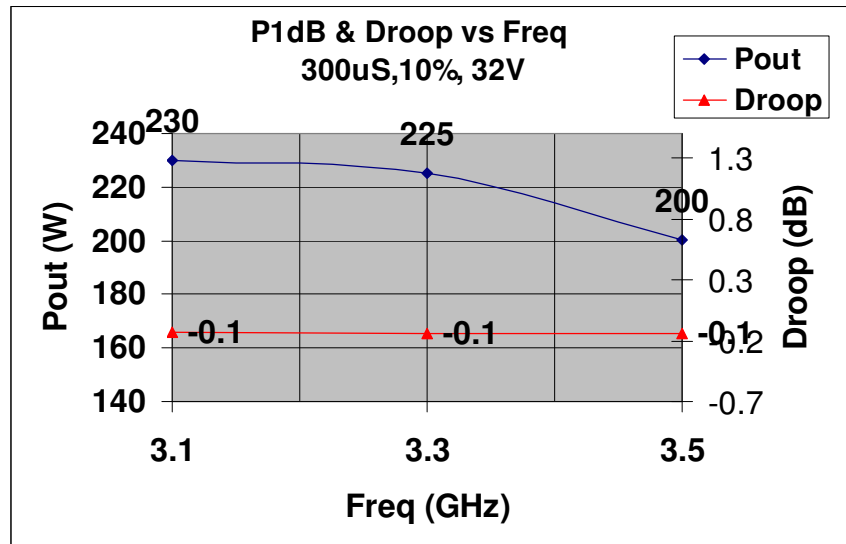

PACKAGE DIMENSIONAL OUTLINE DRAWING

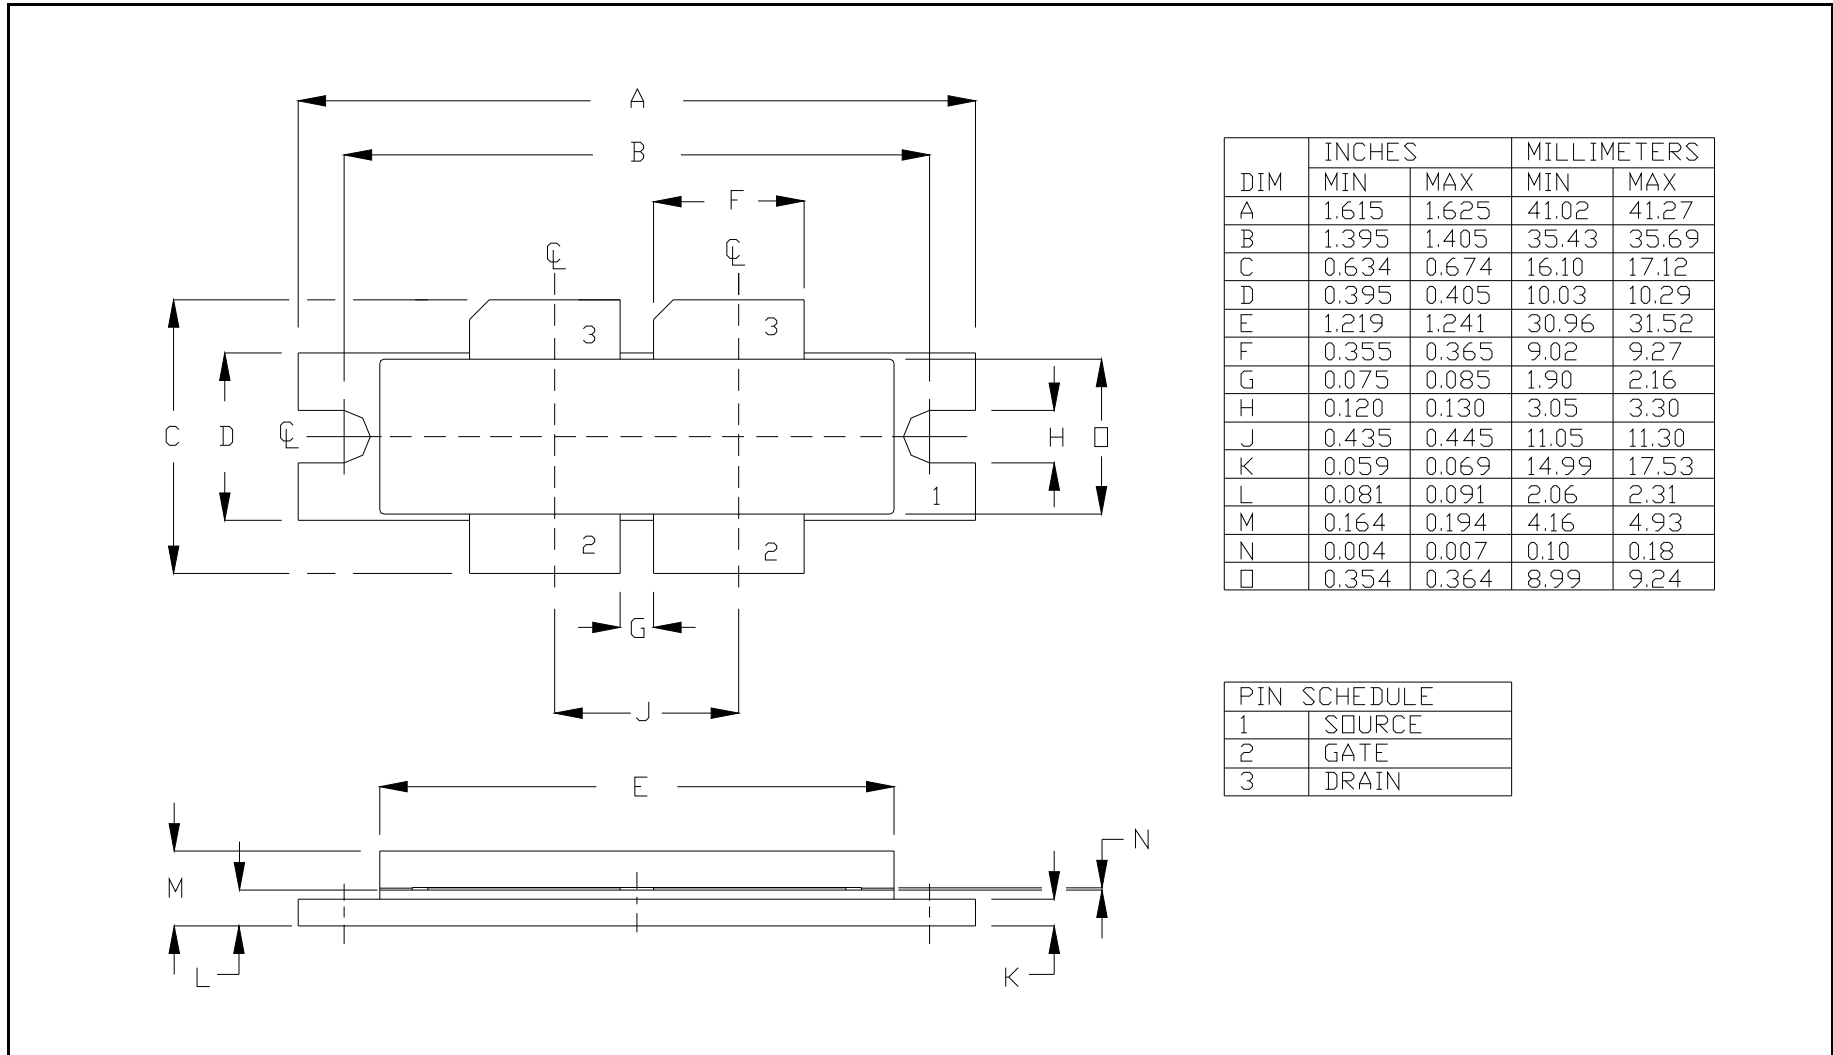

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	1.615	1.625	41.02	41.27
B	1.395	1.405	35.43	35.69
C	0.634	0.674	16.10	17.12
D	0.395	0.405	10.03	10.29
E	1.219	1.241	30.96	31.52
F	0.355	0.365	9.02	9.27
G	0.075	0.085	1.90	2.16
H	0.120	0.130	3.05	3.30
J	0.435	0.445	11.05	11.30
K	0.059	0.069	14.99	17.53
L	0.081	0.091	2.06	2.31
M	0.164	0.194	4.16	4.93
N	0.004	0.007	0.10	0.18
□	0.354	0.364	8.99	9.24

PIN SCHEDULE	
1	SOURCE
2	GATE
3	DRAIN

DEFINITIONS

Data Sheet Status	
Proposed Specification	This data sheet contains proposed specifications.
Preliminary Specification	This data sheet contains specifications based on preliminary measurements and data.
Product Specification	This data sheet contains final product specifications.
Maximum Ratings	
Stress above one or more of the maximum ratings may cause permanent damage to the device. These are maximum ratings only operation of the device at these or at any other conditions above those given in the characteristics sections of the specification is not implied. Exposure to maximum values for extended periods of time may affect device reliability.	

DISCLAIMER

Integra Technologies Inc. makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Integra Technologies Inc. assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Integra Technologies Inc. products are not designed for use in life support appliances, devices, or systems where malfunction of these products can reasonably be expected to result in personal injury. Integra Technologies Inc. customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Integra Technologies Inc. for any damages resulting from such improper use or sale.