

S-Band Radar Miniature Power Amplifier

Part number MPAL3035M30 is a miniaturized power amplifier which is internally matched to 50 ohms. It is designed for S-Band radar systems and operates over the instantaneous bandwidth of 3.0-3.5 GHz. It utilizes gold metal LDMOS transistor technology operating in common source configuration. Production RF performance screening is performed at the 100% level while operating under class AB bias ($I_{DQ} = 10\text{mA}$) with a 300us pulse width at 10% duty. The device is operable under a wide range of biasing and pulsing conditions.



50 Ohm Matched

- Requires no external impedance matching circuitry

Silicon LDMOS Transistor

- Gold Metal

Class AB Operation

- Operable under a wide range of bias conditions

Common Source Configuration

- Chip internal Source grounding

Gold Metal System

- Complete Gold System Including Bond-wires
- Maximum Reliability


Be0 Free Package

- Metal Based
- Epoxy seal

RF High Power Test

- 100% Device RF High Power Screening

TYPICAL RF GAIN VERSUS OUTPUT POWER PERFORMANCE

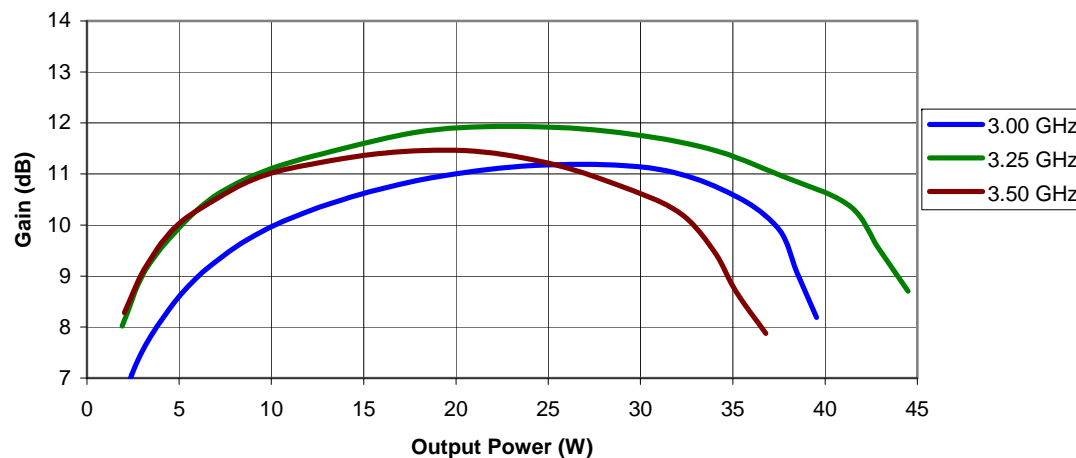

MAXIMUM RATINGS

Screen	Parameter	Symbol	Min	Max	Units	Test Conditions
BD	Drain-Source Voltage	V_{DS}	--	65	V	--
BD	Gate-Source Voltage	V_{GS}	-0.5	12	V	--
BD	Storage Temperature Range	T_{STG}	-55	+150	°C	--
BD	Operating Junction Temperature Range	T_J	-55	+200	°C	--
Note	Screen 'BD' = parameter qualified By Design.					

THERMAL CHARACTERISTICS

Screen	Parameter	Symbol	Min	Max	Units	Test Conditions
BD	Thermal Resistance	$R_{TH(JC)}$	--	0.6	°C/W	$V_{DD}=V1, I_{DQ}=I_{DQ1}, PW=PW1, DF=DF1, T_F=TF1, P_{IN}=P_{IN1}, F=F0.$
Note	Screen 'BD' = parameter qualified By Design.					

PROCESSING SPECIFICATIONS

Screen	Parameter	Symbol	Min	Max	Units	Test Conditions
100%	DC Wafer Probe	--	--	--	--	Per Integra specification.
Q1	Wafer DC and RF Qualification	--	--	--	--	Per Integra specification.
LM	Wire Bond Strength	--	--	--	--	Line monitor per Integra specification.
100%	Pre-cap visual inspection	--	--	--	--	Per Integra specification
100%	Gross leak test	--	--	--	--	MIL-STD-750D, Method 1071, Test Condition C
Note	Screen 'Q1' = parameter is qualified by assembly and test of 3 pieces minimum per wafer.					
Note	Screen 'LM' = parameter is qualified by assembly line monitor.					


DC ELECTRICAL CHARACTERISTICS

Screen	Parameter	Symbol	Min	Max	Units	Test Conditions
100%	Drain-Source Breakdown Voltage	BV_{DSS}	65	--	V	$I_{DS} = 20mA, V_{GS} = 0V, T_F = 25\pm5^\circ C.$
BD	Drain Leakage Current	I_{DSS}	--	2.0	μA	$V_{DS} = 32V, V_{GS} = 0V, T_F = 25\pm5^\circ C.$
100%	Operating Gate Voltage	V_{GS}	2.5	4.0	V	$V_{DS} = 5V, I_D = 0.1A, T_F = 25\pm5^\circ C.$
BD	Gate Leakage Current	I_{GSS}	--	2.0	μA	$V_{GS} = 10V, V_{DS} = 0V, T_F = 25\pm5^\circ C.$

RF ELECTRICAL CHARACTERISTICS

Screen	Parameter	Symbol	Min	Max	Units	Test Conditions
100%	Input Return Loss	IRL1	-18	-7	dB	$V_{DD}=V1, I_{DQ}=I_{DQ1}, PW=PW1, DF=DF1, T_F=TF1,$ $P_{IN}= P_{IN1}, F=F1.$
100%	Input Return Loss	IRL2	-18	-10	dB	$V_{DD}=V1, I_{DQ}=I_{DQ1}, PW=PW1, DF=DF1, T_F=TF1,$ $P_{IN}= P_{IN2}, F=F2.$
100%	Input Return Loss	IRL3	-18	-10	dB	$V_{DD}=V1, I_{DQ}=I_{DQ1}, PW=PW1, DF=DF1, T_F=TF1,$ $P_{IN}= P_{IN3}, F=F3.$
100%	Power Gain	G_p	10.0	15.0	dB	$V_{DD}=V1, I_{DQ}=I_{DQ1}, PW=PW1, DF=DF1, T_F=TF1,$ $P_{IN}= P_{IN1}, P_{IN2}, P_{IN3}, F=F1, F2, F3.$
100%	Power Gain Flatness versus Frequency	GF	0.0	1.3	dB	$V_{DD}=V1, I_{DQ}=I_{DQ1}, PW=PW1, DF=DF1, T_F=TF1,$ $P_{IN}= P_{IN1}, P_{IN2}, P_{IN3}, F=F1, F2, F3.$
100%	Drain Current - Peak	I_D	2.00	4.00	A	$V_{DD}=V1, I_{DQ}=I_{DQ1}, PW=PW1, DF=DF1, T_F=TF1,$ $P_{IN}= P_{IN1}, P_{IN2}, P_{IN3}, F=F1, F2, F3.$
100%	Pulse Amplitude Droop	D	-0.50	+0.20	dB	$V_{DD}=V1, I_{DQ}=I_{DQ1}, PW=PW1, DF=DF1, T_F=TF1,$ $P_{IN}= P_{IN1}, P_{IN2}, P_{IN3}, F=F1, F2, F3.$
100%	Stability into 3:1 VSWR	VSWR-S	--	--	--	$V_{DD}=V1, I_{DQ}=I_{DQ1}, PW=PW1, DF=DF1, T_F=TF1,$ $P_{IN}= P_{IN1}, P_{IN2}, P_{IN3}, F=F1, F2, F3.$ Rotate 3:1 output VSWR through 360° phase. No oscillatory or pulse break-up characteristics allowed on detected output pulse. All non-harmonically related signals must be at least -65 dBc.
Note 1	$V1 = 32V; I_{DQ1} = 20mA; PW1 = 300\mu s; DF1 = 10\%$					
Note 2	Input Power Test Levels: $P_{IN1} = P_{IN2} = P_{IN3} = 2.0W$					
Note 3	Test Frequencies: $F1 = 3.0 GHz, F2 = 3.3 GHz, F3 = 3.5 GHz.$					
Note 3	$T_F = 25\pm 5^\circ C =$ Device Flange Temperature					


PACKAGE DIMENSIONAL OUTLINE DRAWING

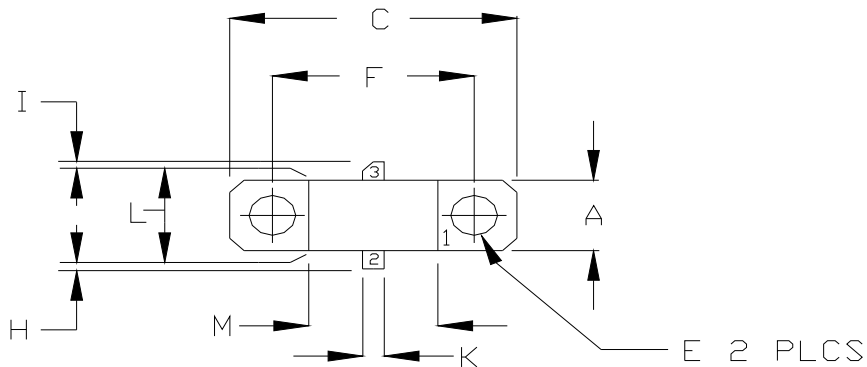


DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.225	0.235	5.71	5.96
B	0.055	0.065	1.40	1.65
C	0.795	0.805	20.19	20.44
D	0.140	0.160	3.55	4.06
E	0.125	0.135	3.18	3.43
F	0.557	0.567	14.14	14.40
G	0.077	0.087	1.95	2.20
H	0.050	0.070	1.27	1.77
I	0.050	0.070	1.27	1.77
J	0.004	0.006	0.10	0.15
K	0.055	0.065	1.40	1.65
L	0.225	0.235	5.71	5.96
M	0.355	0.365	9.01	9.27

PIN SCHEDULE	
1	SOURCE
2	GATE
3	DRAIN

NOTES:
LID: LID-PL32-1

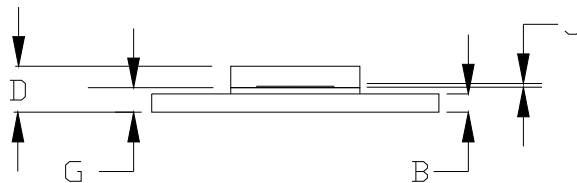

RF TEST FIXTURE

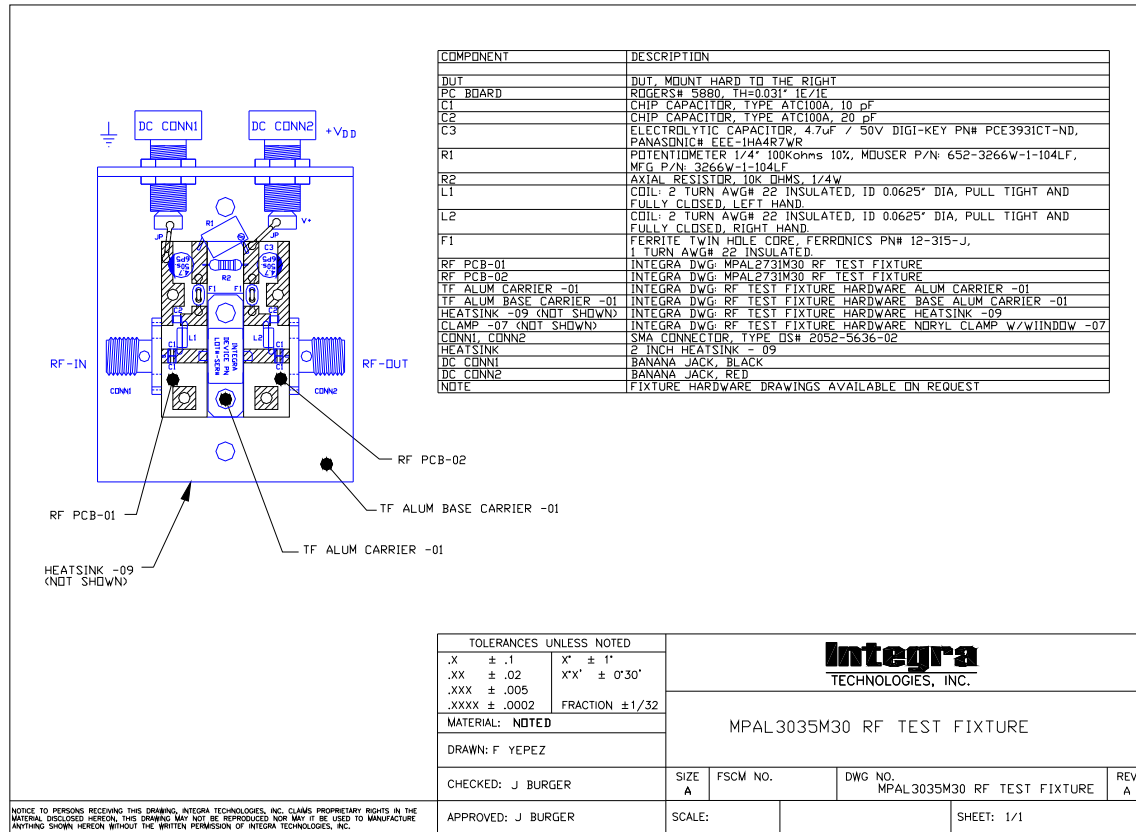

CONTACT FACTORY FOR RF TEST FIXTURE CAD DRAWING WITH CIRCUIT DIMENSIONS

<L:\Public\Controlled Documents\Controlled Drawings\RF Test Fixture Drawings\MPAL3035M30 RF TEST FIXTURE REV A.dwg>

DEFINITIONS

Data Sheet Status	
Proposed Specification	This data sheet contains proposed specifications.
Preliminary Specification	This data sheet contains specifications based on preliminary measurements and data.
Product Specification	This data sheet contains final product specifications.
Maximum Ratings	
Stress above one or more of the maximum ratings may cause permanent damage to the device. These are maximum ratings only. Operation of the device at these or at any other conditions above those given in the characteristics sections of the specification is not implied. Exposure to maximum values for extended periods of time may affect device reliability.	

WARNING

Product and environmental safety - toxic materials
This product contains beryllium oxide. The product is entirely safe provided that the BeO base is not damaged. All persons who handle, use or dispose of this product should be aware of its nature and of the necessary safety precautions. After use, dispose of as chemical or special waste according to the regulations applying at the location of the user. It must never be thrown out with general or domestic waste.

DISCLAIMER

Integra Technologies Inc. reserves the right to make changes without further notice to any products herein. Integra Technologies Inc. makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Integra Technologies Inc. assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Integra Technologies Inc. products are not designed for use in life support appliances, devices, or systems where malfunction of these products can reasonably be expected to result in personal injury. Integra Technologies Inc. customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Integra Technologies Inc. for any damages resulting from such improper use or sale.
--