L-Band, GaN/SiC, RF Power Transistor

960 - 1220 MHz | 3000 W typ | 70% Efficiency typ | 18dB Gain typ | 125V | 24 x (3.5µs on, 11µs off) Pulse Length, 1.1% LTDC

IGN0912M2500 and IGN0912M2500S are high power GaN-on-SiC RF power transistors that have been designed to suit the unique needs of TACAN systems. Under 24 x (3.5µs on, 11µs off), LTDC =1.1% duty cycle pulse conditions, they supply a minimum of 2500 W of peak output power, with typically > 17dB of associated gain and 70% efficiency. They operate from a 125V supply voltage. For optimal thermal efficiency, the transistors are housed in a metal-based package with an epoxy-sealed ceramic lid.

FEATURES

- GaN on SiC HEMT Technology
- Output Power >2500 W
- Pre-matched Input and Output Impedance
- High Efficiency - up to 75% during the RF pulse
- 100% RF Tested under 24 x (3.5µs on, 11µs off), LTDC =1.1% pulse conditions
- RoHS and REACH Compliant



APPLICATIONS

- TACAN and DME Systems

Table 1. RF Electrical Characteristics (Case temperature = 30 °C unless otherwise stated)

Parameter	Symbol	Min	Typ	Max	Units	Test Conditions
Gain	G		17.0		dB	P_{OUT} = 2500W f = 960, 1090, 1215 MHz 24 x (3.5µs on, 11µs off), LTDC =1.1% V_{ds} = 125V, I_{DS} = 75mA
Drain Efficiency	η		70		%	
Pulse Droop	D		-0.25		dB	
Input Return Loss	IRL		12		dB	
Load Mismatch Stability	VSWR-S	2:1				
VSWR Withstand	VSWR-LMT	5:1				

Note 1: Consult Integra Technologies Application Note 001 for information on how RF output power and pulse droop are measured.

Table 2. DC Electrical Characteristics (Case temperature = 25 °C unless otherwise stated)

Parameter	Symbol	Min	Typ	Max	Units	Test Conditions
Gate Pinch-Off Voltage	V_P	-5.0			V	V_{DS} = 125V, I_{DS} = 1mA
Quiescent Gate Voltage	V_Q		-2.9		V	V_{DS} = 125V, I_{DS} = 75mA

Table 3. Absolute Maximum Ratings (Not Simultaneous)

Parameter	Symbol	Value	Units	Test Conditions
DC Drain-Source Voltage	V_{DS}	500	V	25 °C
DC Gate-Source Voltage	V_{GS}	-8 to +1.0	V	25 °C
DC Drain Current	I_D	78	A	25 °C
DC Gate Current	I_G	78	mA	25 °C
RF Input Power	$P_{RF,IN}$	27	W	25 °C
Operating Channel Temperature	T_J	-55 to +225	°C	
Storage Temperature	T_{STG}	-62 to +150	°C	
Soldering Temperature	T_{SOLDER}	260 for 60s	°C	

Note: Operation outside the limits given in this table may cause permanent damage to the transistor

Table 4. Thermal Resistance (Case temperature = 85 °C unless otherwise stated)

Parameter	Symbol	Typ	Units	Test Conditions
Peak Thermal Resistance, Channel to Case	R_{TH}	0.05	°C/W	P_{diss} = 1071W V_{DS} = 125V 24 x (3.5µs on, 11µs off), LTDC =1.1%

Table 5. Test Fixture Source & Load Impedances (Case temperature = 25 °C unless otherwise stated)

Frequency (MHz)	Z_{IF}	Z_{OF} Fundamental	Z_{OF} Second Harmonic	Units	Test Conditions
960	1.44 - j 1.77	2.15 - j 2.10	0.7 + j 1.46	Ω	P_{OUT} = 2500W 24 x (3.5µs on, 11µs off), LTDC =1.1% V_{DS} = 125V, I_{DS} = 75mA
1090	1.34 - j 0.52	2.28 - j 1.39	0.7 + j 3.45	Ω	
1220	1.39 + j 0.72	2.45 - j 1.14	1.0 + j 6.87	Ω	

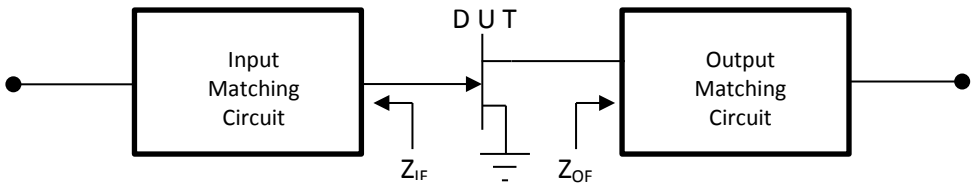

TYPICAL PERFORMANCE

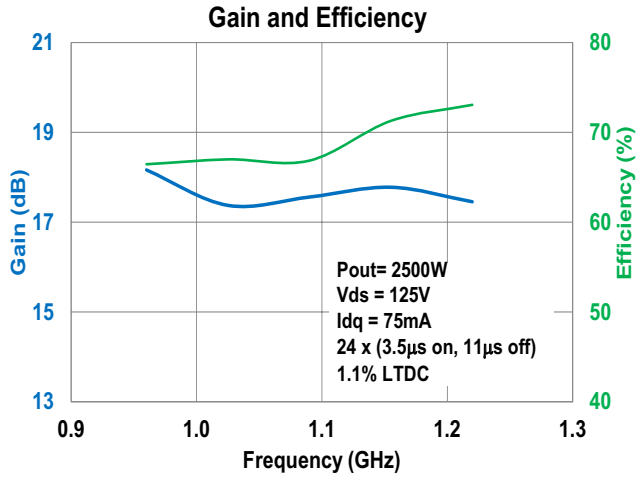

Figure 1

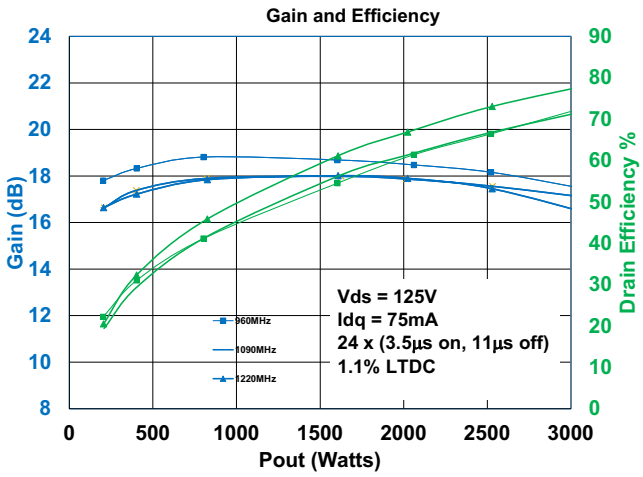

Figure 2

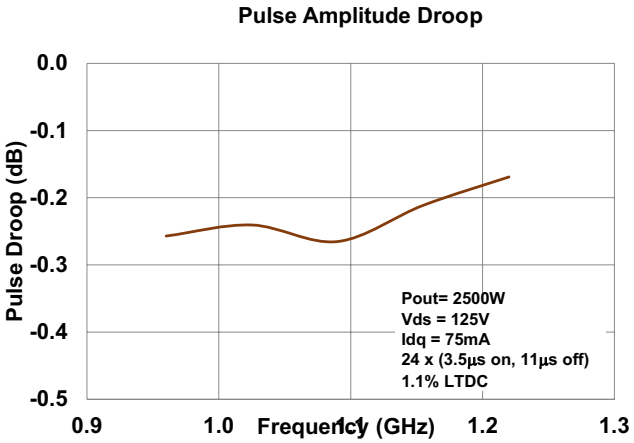

Figure 3

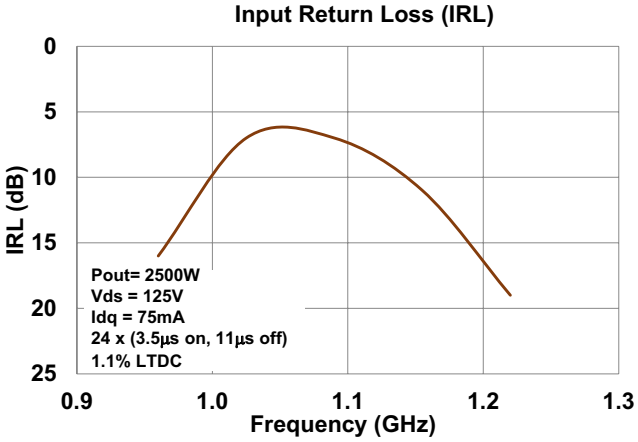

Figure 4

TEST FIXTURE

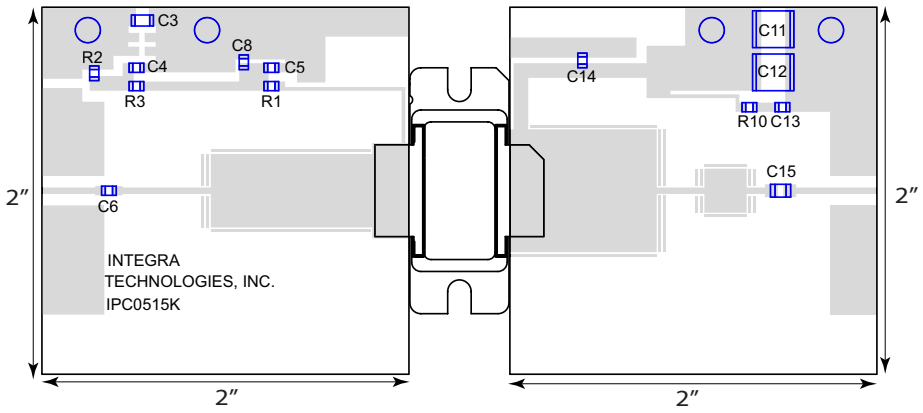

Bill of Materials for IGN0912M2500 Test Fixture

Designator	Description	Part Number
C3	CAP 1μF, 1206 100V, X7R	12061C105K4T2A
C4, C13	CAP 0.068μF, 0805 250V, X7R	C0805C683KARAC#A
C5, C6, C14	CAP 33pF, 0805, Edge Mount	ATC600F330
C8	CAP 1000pF, 0805, 100V	08051A102J4T2A
C11, C12	CAP 2.2μF, 2220 250V, X7R	C5750X7T2E225K250KA
C15	CAP 150pF, Edge Mount	ATC800B
R1, R10	RES 15 OHM, 0805	CRCW080515R0JNEA
R2	RES, 100 OHM, 0805	CRCW0805100RFKTA
R3	RES, 0 OHM, 0805	CRCW08050000ZSTA
PC Board Type	ROGERS RO 3006, 25mil, 2/2oz. Copper	

PACKAGE PL95A1

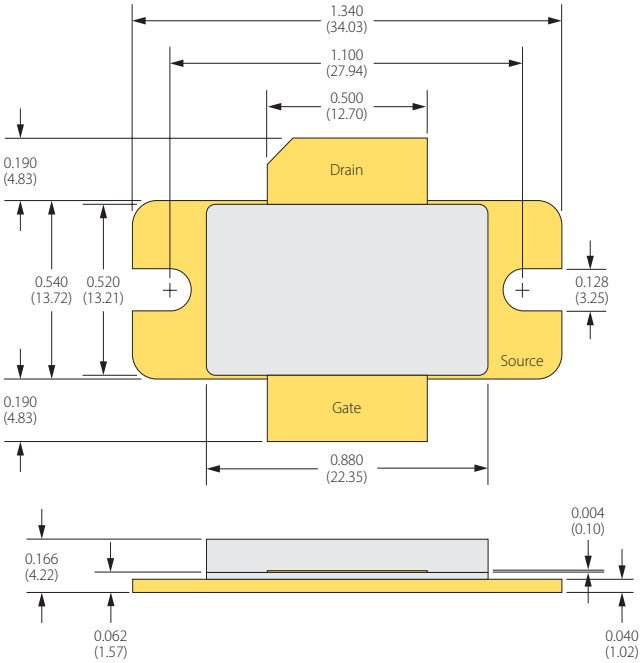

BOLT-DOWN FLANGE OPTION
IGN0912M2500

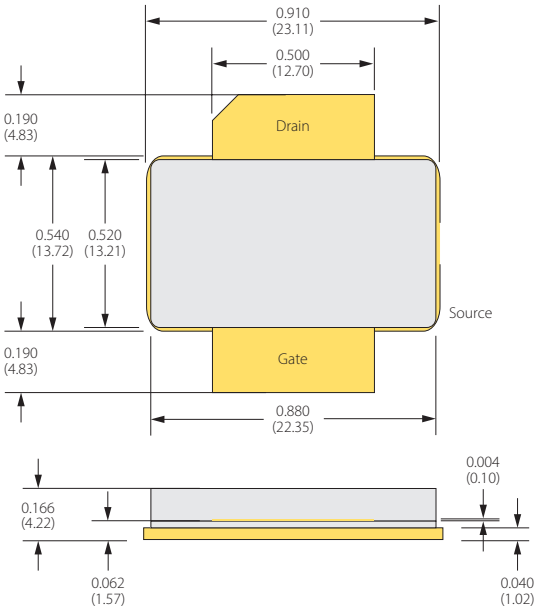

EARLESS FLANGE OPTION
IGN0912M2500 S

Dimensions: Inches (mm)

ESD & MSL Rating

Parameter	Rating	Standard
ESD Human Body Model (HBM)	TBD	ESDA/JEDEC JS-001-2012
ESD Charged Device Model (CDM)	TBD	JEDEC JESD22-C101F
Moisture Sensitivty Level (MSL)	Unlimited Shelf Life	IPC/JEDEC J-STD-020

RoHS Compliance

Integra Technologies, Inc declares that its GaN and LDMOS Transistor Products comply with EU Directive 2011/65/EU on the restriction of the use of certain hazardous substances in electrical and electronic equipment (RoHS2), as adopted by EU member states on January 2, 2013 and amended on March 31, 2015 by EU Directive 2015/863/EU.

REACH Compliance

Integra Technologies supports EU Regulation number 1907/2006 concerning the Registration, Evaluation, Authorization, and Restriction of Chemicals (REACH) as these apply to Integra semiconductor products, development tools, and shipping packaging.

In support of the REACH regulation, Integra will:

- Inform customers and recipients of Integra product if they contain any substances that are of very high concern (SVHC) per the European Chemical Agency (ECHA) website.
- Notify ECHA if any Integra product that contains any SVHCs which exceed guidelines for REACH chemicals by weight per part number and for total content weight per year for all products produced in or imported to the European market.
- Cease shipments of product containing REACH Annex XIV substances until authorization has been obtained.
- Cease shipment of product containing REACH Annex XVII chemicals when restrictions apply.

Integra has evaluated its materials, BOMs, and product specifications and product and has determined that this transistor conforms to all REACH and SVHC regulations and guidelines. Integra has implemented actions and control programs that will assure continued compliance.

Disclaimer

Integra Technologies Inc. reserves the right to make changes without further notice to any products herein. Integra Technologies Inc. makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Integra Technologies Inc. assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Integra Technologies Inc. products are not designed for use in life support appliances, devices, or systems where malfunction of these products can reasonably be expected to result in personal injury. Integra Technologies Inc. customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Integra Technologies Inc. for any damages resulting from such improper use or sale.

DEFINITIONS:
DATA SHEET STATUS
Advanced Specification - This data sheet contains Advanced specifications.
Preliminary Specification - This data sheet contains specifications based on preliminary measurements and data.
Final Specification - This data sheet contains final product specifications.
MAXIMUM RATINGS Stress above one or more of the maximum ratings may cause permanent damage to the device. These are maximum ratings only operation of the device at these or at any other conditions above those given in the characteristics sections of the specification is not implied. Exposure to maximum values for extended periods of time may affect device reliability.

Integra Technologies, 321 Coral Circle, El Segundo, CA 90245-4620 | Phone: 310-606-0855 | Fax: 310-606-0865