

**L-Band Avionics Transistor**

The high power pulsed transistor device part number IB0912M500 is designed for systems operating over the instantaneous bandwidth of 960-1215 MHz. While operating in class C mode under the specified pulsed conditions and  $V_{cc}=50V$ , this common base device supplies a minimum of 500 watts of peak pulse power. It utilizes a low loss internal input impedance matching structure to yield maximum device gain and to ease the implementation of external matching circuitry. The new generation bipolar transistor geometry utilizes a gold metallization system to achieve maximum reliability. Emitter ballast resistance is incorporated on the active cell for optimum thermal distribution and maximum reliability. All devices are 100% screened for large signal RF parameters.



**Silicon Bipolar**

- Ultra-high  $f_T$

**Class C Operation**

- High Efficiency

**Common Base Configuration**

- Single Power Supply

**Gold Metal**

- Maximum Reliability

**Emitter Ballasting**

- Optimum Thermal Distribution

**Internal Impedance Matching**

- Ease of Use
- Ultra-low Loss Design

**Be0 Package**

- Unmatched Thermal Reliability

**RF Test Fixture**

- Broadband
- Matched to 50Ω
- Long-term Correlation
- 100% Device RF Screening
- No External Tuning Allowed
- Micro-strip structure on soft pc board with dielectric constant 10.2

**TYPICAL DATA TYPICAL DATA TYPICAL DATA TYPICAL DATA**

General Information	Test Sequence	Freq	PIN	RL	FOUT	GP	dG	IC	rc	Drop	VS/RS	VS/RLIMIT
	Name	(MHz)	(W)	(dB)	(W)	(dB)	(dB)	(A)	(%)	(dB)	1.51	31
Date:	2/11/2009											
Asbly Lot - SN:	D2615	Nominal	960	90	-10.0	665	8.62	23.190	56.5	-0.06	P	P
Wafer:	B4DE-64											
Test Fixture:	1448	Nominal	1090	90	-11.0	608	8.30	21.400	56.8	-0.06	P	P
Pass / Fail:	Device Passes											
OPERATOR:	FB	Nominal	1215	90	-14.0	546	7.83	19.000	57.5	-0.06	P	P
Pulse: 10us-10%	Vcc=50V											

**MAXIMUM RATINGS**

Screen	Parameter	Symbol	Min	Max	Units	Test Conditions
BD	Collector-Emitter Voltage	$V_{CES}$	--	75	V	--
BD	Emitter-Base Voltage	$V_{EBO}$	--	2	V	--
BD	Storage Temperature Range	$T_{STG}$	-55	+150	°C	--
BD	Operating Junction Temperature Range	$T_J$	-55	+200	°C	--
Note	Screen 'BD' = parameter qualified By Design.					

**THERMAL CHARACTERISTICS**

Screen	Parameter	Symbol	Min	Max	Units	Test Conditions
BD	Thermal Resistance	$R_{TH(JC)}$	--	0.099	°C/W	$V_{CC}=50V$ , Pulse format=10us/10%, $T_F=25\pm 5^\circ C$ , $P_{IN}=90W$ , $N_C=50\%$
Note	Screen 'BD' = parameter qualified By Design.					

**PROCESSING SPECIFICATIONS**

Screen	Parameter	Symbol	Min	Max	Units	Test Conditions
100%	DC Wafer Probe	--	--	--	--	Per Integra specification.
Q1	Wafer DC and RF Qualification	--	--	--	--	Per Integra specification.
LM	Wire Bond Strength	--	--	--	--	Line monitor per Integra specification.
100%	Pre-cap visual inspection	--	--	--	--	Per Integra specification
100%	Gross leak test	--	--	--	--	MIL-STD-750D, Method 1071, Test Condition C
Note	Screen 'Q1' = parameter is qualified by assembly and test of 3 pieces minimum per wafer.					
Note	Screen 'LM' = parameter is qualified by assembly line monitor.					

**DC ELECTRICAL CHARACTERISTICS**

Screen	Parameter	Symbol	Min	Max	Units	Test Conditions
100%	Collector-Emitter Breakdown Voltage	$BV_{CES}$	75	--	V	$I_C = 40mA$ , $V_{BE} = 0V$ , $T_F = 25\pm 5^\circ C$ .
100%	Zero Base Voltage Collector Leakage Current	$I_{CES}$	--	500	$\mu A$	$V_{CE} = 50V$ , $V_{BE} = 0V$ , $T_F = 25\pm 5^\circ C$ .
100%	DC Current Gain	$H_{FE}$	20	100	--	$V_{CE} = 5V$ , $I_C = 500mA$ , $T_F = 25\pm 5^\circ C$ .


**RF ELECTRICAL CHARACTERISTICS**

Screen	Parameter	Symbol	Min	Max	Units	Test Conditions
100%	Input Return Loss	IRL	-18	-8	dB	$V_{CC}=50V$ , $P_{IN}=90W$ , Pulse = Note 2, $T_F=25\pm 5^\circ C$ , $F=F1$ .
BD	Maximum Overdrive	$P_{IN(MAX)}$	--	120	W	$V_{CC}=50V$ , Pulse = Note 2, $T_F=25\pm 5^\circ C$ , $F=F1$ .
100%	Power Gain	$G_P$	7.50	9.00	dB	$V_{CC}=50V$ , $P_{IN}=90W$ , Pulse = Note 2, $T_F=25\pm 5^\circ C$ , $F=F1$
100%	Output Power	$P_{OUT}$	500	715	W	$V_{CC}=50V$ , $P_{IN}=90W$ , Pulse = Note 2, $T_F=25\pm 5^\circ C$ , $F=F1$
100%	Collector Efficiency ( $P_o/I_c/V_{CC}$ )	$N_C$	50	75	%	$V_{CC}=50V$ , $P_{IN}=90W$ , Pulse = Note 2, $T_F=25\pm 5^\circ C$ , $F=F1$ .
BD	Pulse Amplitude Droop	D	-0.5	0.5	dB	$V_{CC}=50V$ , $P_{IN}=90W$ , Pulse = Note 2, $T_F=25\pm 5^\circ C$ , $F=F1$ .
100%	Gain Flatness	$\Delta G$		1.5	dB	Delta between highest gain and lowest gain from 960-1215MHz
100%	Stability into 1.5:1 VSWR	VSWR-S	--	--	--	$V_{CC}=50V$ , $P_{IN}=90W$ , Pulse = Note 2, $T_F=25\pm 5^\circ C$ , $F=F1$ . Rotate 1.5:1 output VSWR through 360° phase. No oscillatory or pulse break-up characteristics allowed on detected output pulse.
100%	Load Mismatch Tolerance	LMT	3:1	--	--	$V_{CC}=50V$ , $P_{IN}=90W$ , Pulse = Note 2, $T_F=25\pm 5^\circ C$ , $F=F1$ . Rotate 3:1 output VSWR through 360° phase. Survival.
Note 1	F1 = 960/1090/1215 MHz.					
Note 2	Pulse width = 10us, Duty Factor = 10%					
Note 3	$T_F$ = Device flange temperature.					
Note 4	Screen 'BD' = parameter qualified By Design.					


**RF TEST FIXTURE IMPEDANCE CHARACTERISTICS**

Frequency (MHz)	$Z_{IF}$ ( $\Omega$ )	$Z_{OF}$ ( $\Omega$ )
960	1.0 - j1.64	1.59 - j1.37
1090	1.17 - j1.08	1.63 - j0.89
1215	1.36 - j0.88	1.48 - j0.57
Impedance Definition		

**PACKAGE DIMENSIONAL OUTLINE DRAWING**

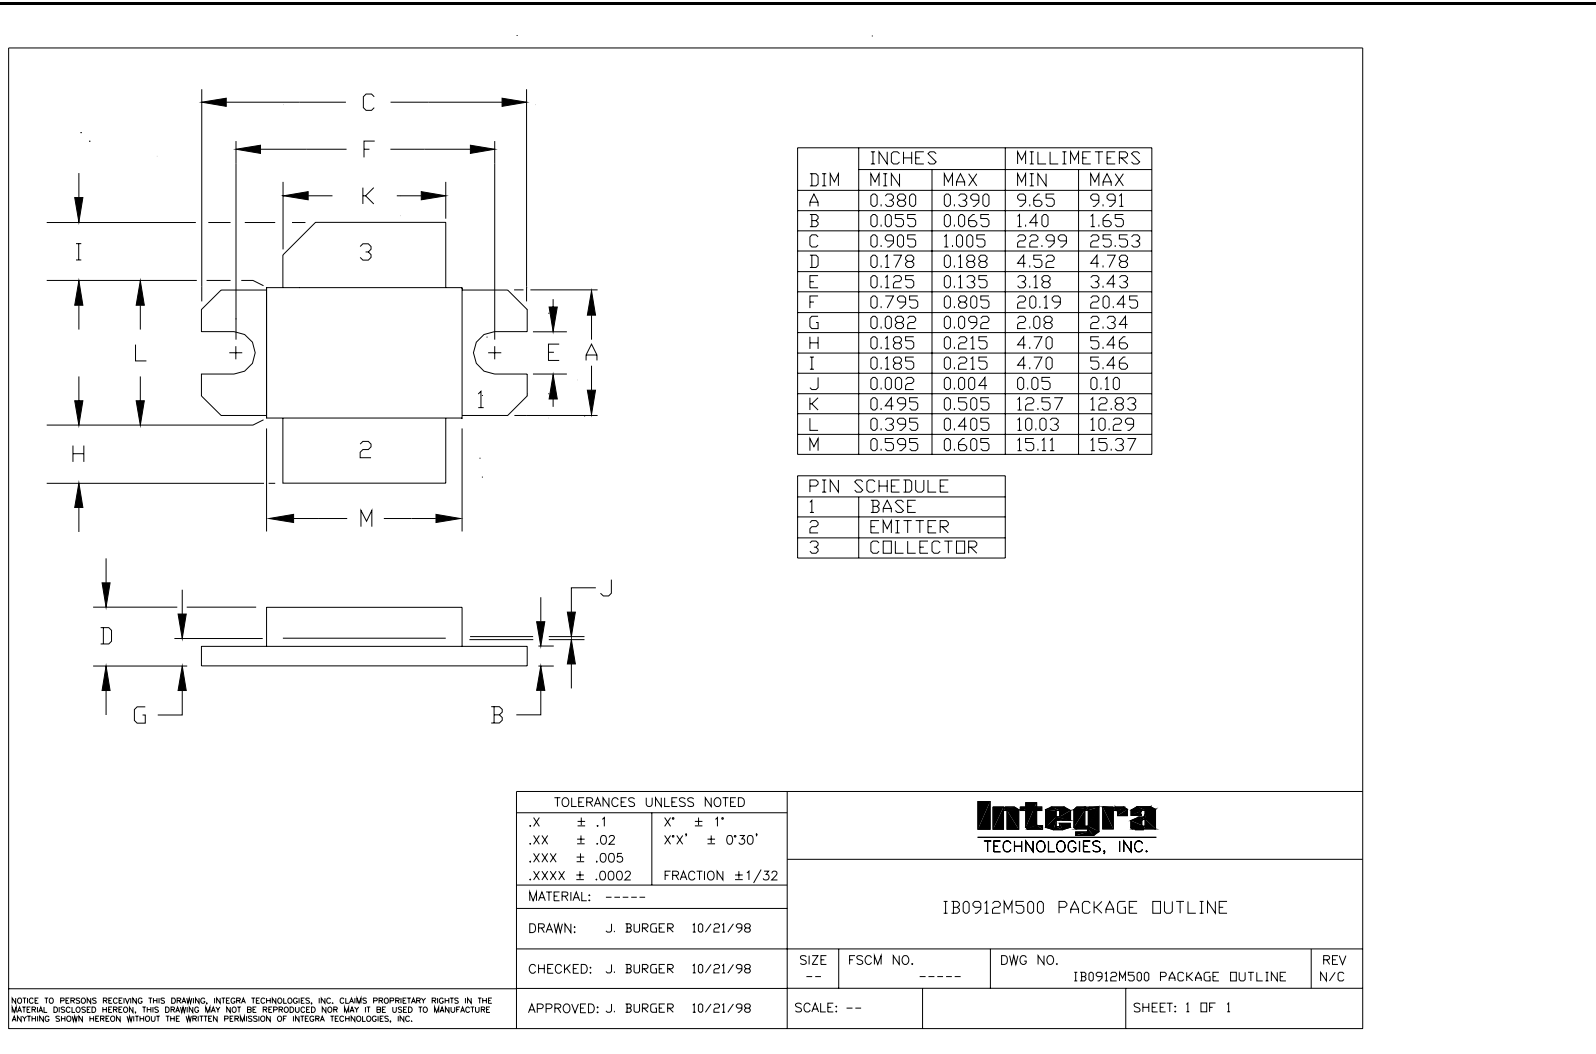


**RF TEST FIXTURE**

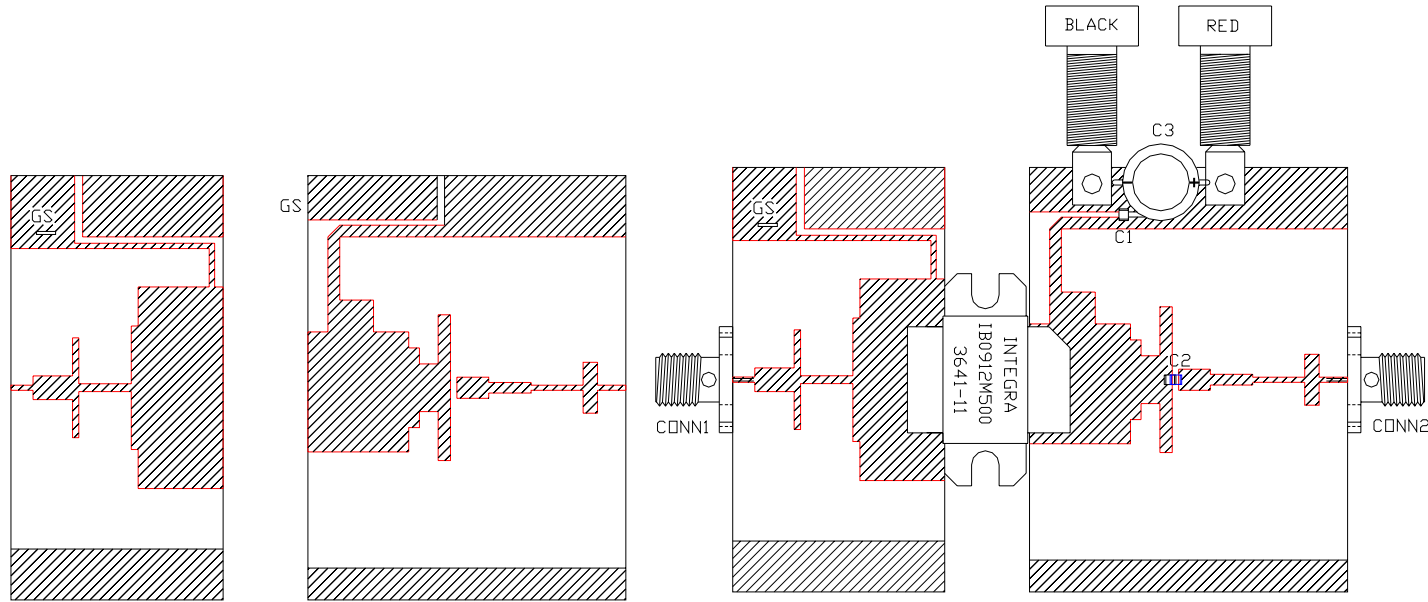


COMPONENT	DESCRIPTION
DUT	TRANSISTOR IB0912M500, MOUNT HARD TO THE RIGHT
PC BOARD	ROGERS RD3010, 25 mils, 1 oz. Cu
C1, C2	CHIP CAPACITOR, TYPE ATC100A, 100 pF
C3	ELECTROLYTIC CAPACITOR, 68uF / 63V
GS	GROUND SHIM, COPPER, TH=0.001"
CONN1, CONN2	SMA CONNECTOR, TYPE DS #2052-5636-02
INPUT PC BOARD CARRIER	2 INCH BRASS - 03
OUTPUT PC BOARD CARRIER	2 INCH BRASS - 05
TRANSISTOR CARRIER	2 INCH COPPER - 03
TRANSISTOR CLAMP	NDRYL CLAMP - 04
HEATSINK	2 INCH HEATSINK - 11
DC CONN1	BANANA JACK, BLACK
DC CONN2	BANANA JACK, RED
NOTE	FIXTURE HARDWARE DRAWINGS AVAILABLE ON REQUEST

**ASSEMBLY AND PARTS LIST**

**RF TEST FIXTURE**

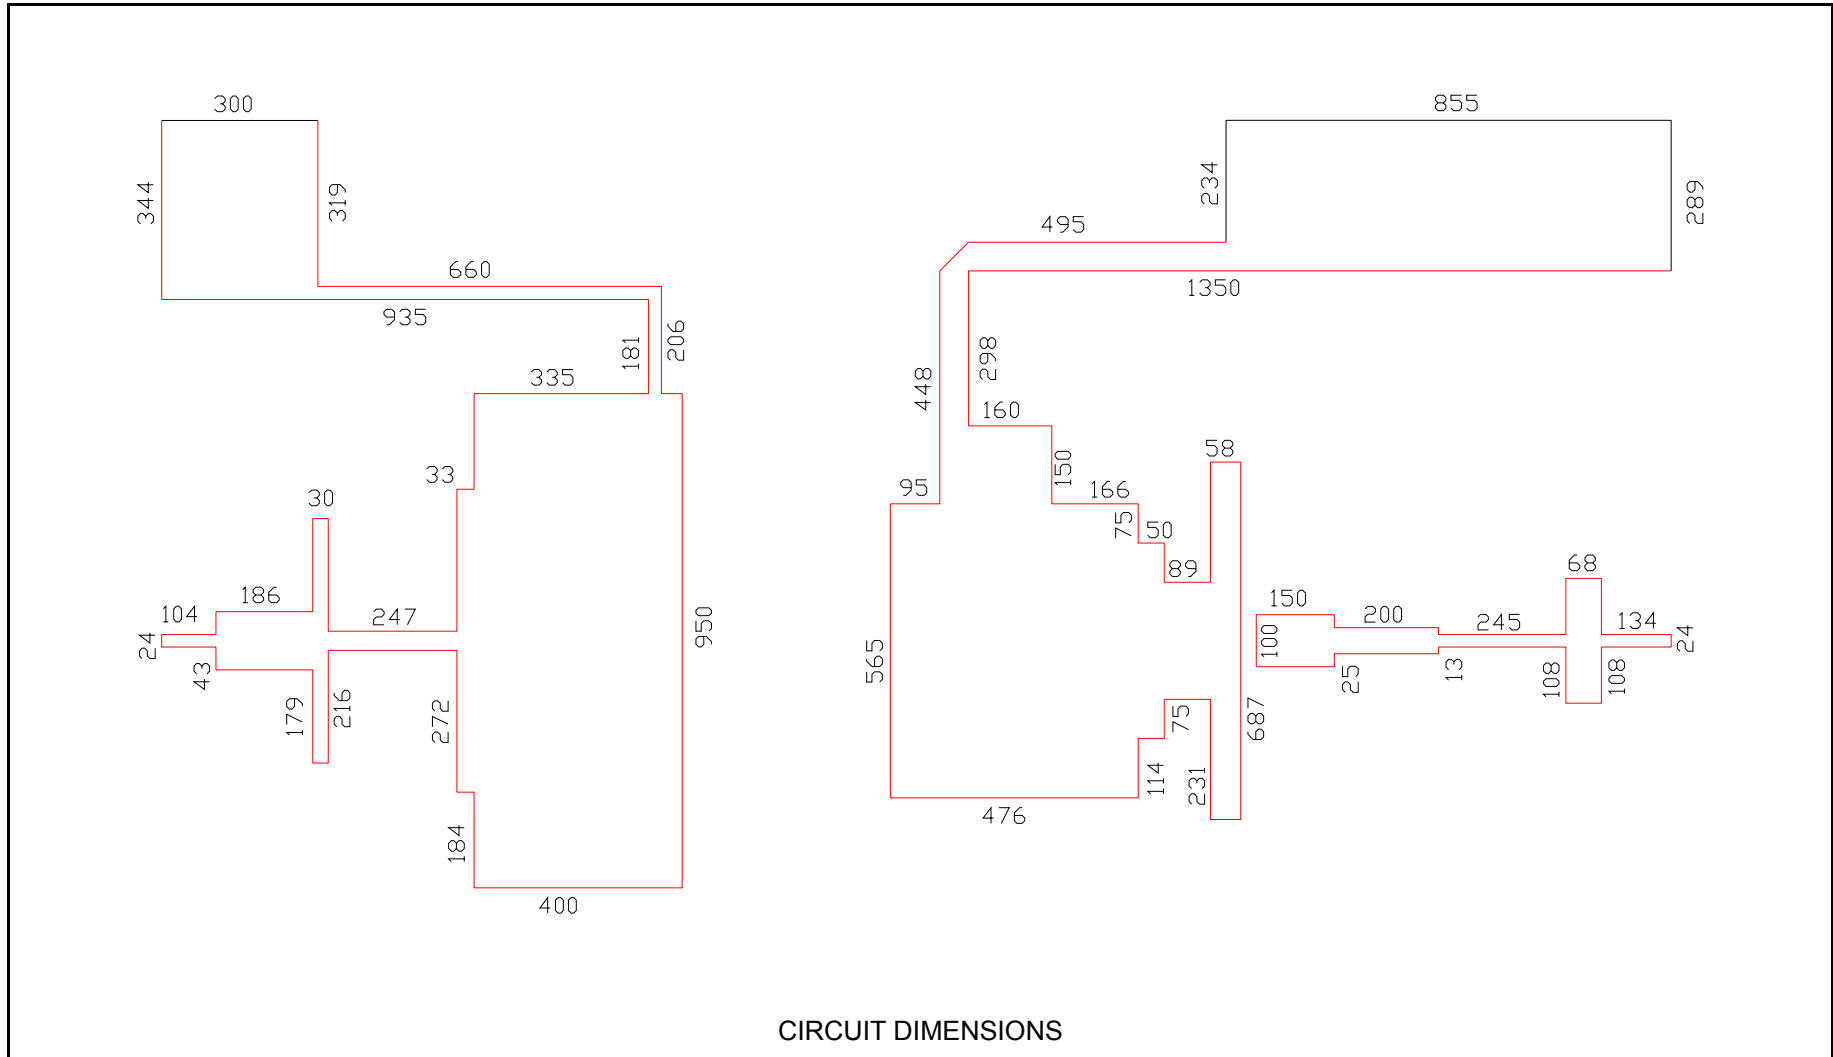

**RF TEST FIXTURE**

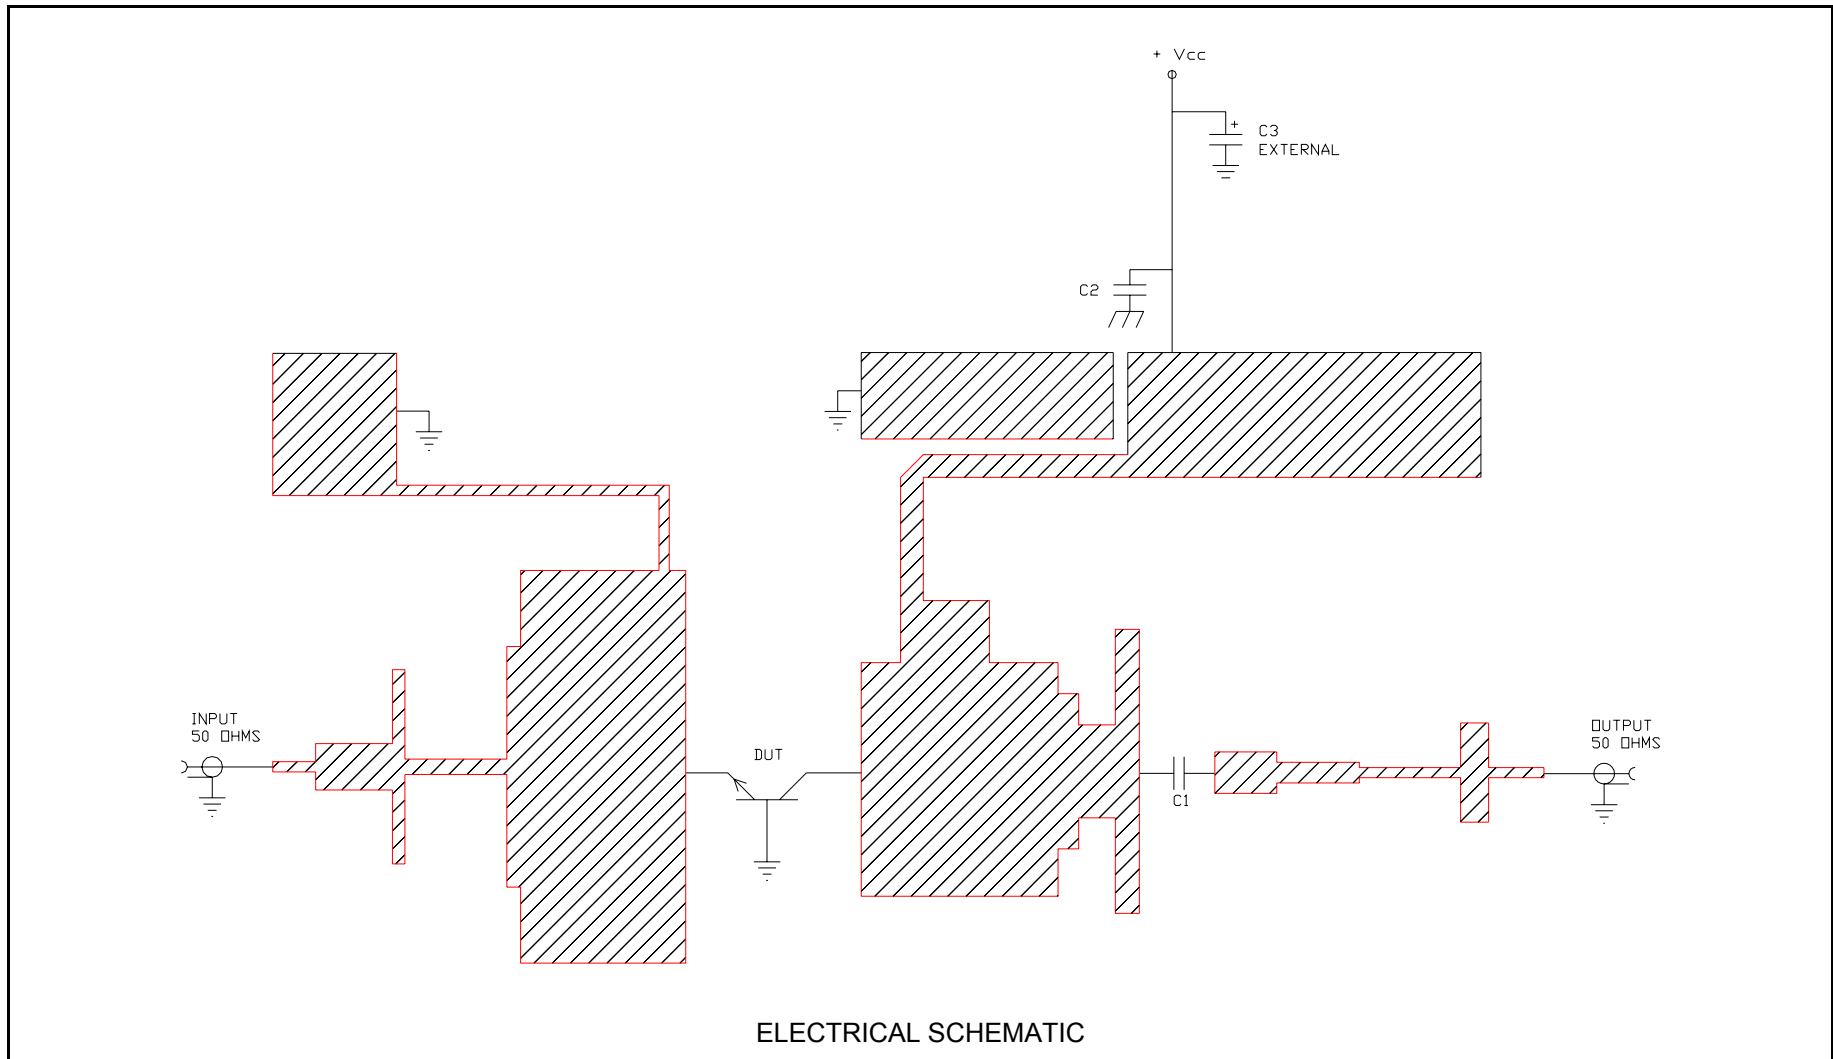

**DEFINITIONS**

<b>Data Sheet Status</b>	
Proposed Specification	This data sheet contains proposed specifications.
Preliminary Specification	This data sheet contains specifications based on preliminary measurements and data.
Product Specification	This data sheet contains final product specifications.
<b>Maximum Ratings</b>	
Stress above one or more of the maximum ratings may cause permanent damage to the device. These are maximum ratings only and operation of the device at these or at any other conditions above those given in the characteristics sections of the specification is not implied. Exposure to maximum values for extended periods of time may affect device reliability.	

**WARNING**

<b>Product and environmental safety - toxic materials</b>
This product contains beryllium oxide. The product is entirely safe provided that the BeO base is not damaged. All persons who handle, use or dispose of this product should be aware of its nature and of the necessary safety precautions. After use, dispose of as chemical or special waste according to the regulations applying at the location of the user. It must never be thrown out with general or domestic waste.

**DISCLAIMER**

Integra Technologies Inc. reserves the right to make changes without further notice to any products herein. Integra Technologies Inc. makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Integra Technologies Inc. assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Integra Technologies Inc. products are not designed for use in life support appliances, devices, or systems where malfunction of these products can reasonably be expected to result in personal injury. Integra Technologies Inc. customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Integra Technologies Inc. for any damages resulting from such improper use or sale.
--